

Solar Mobile Phone Charger


Bright solar

ALL SOLUTIONS –

Mobile Phone Power Bank, Mobile Phone Charger, Flashlight Charging, 5V LED Light and Battery

FEATURES:

- Ultra Lightweight
- Highest Efficiency
- Extra-thick 1680D canvas
- 2 USB 3.0 fast charging
- Highly Durable ETFE coating
- Foldable design for easy transport
- 0~3% Tolerance

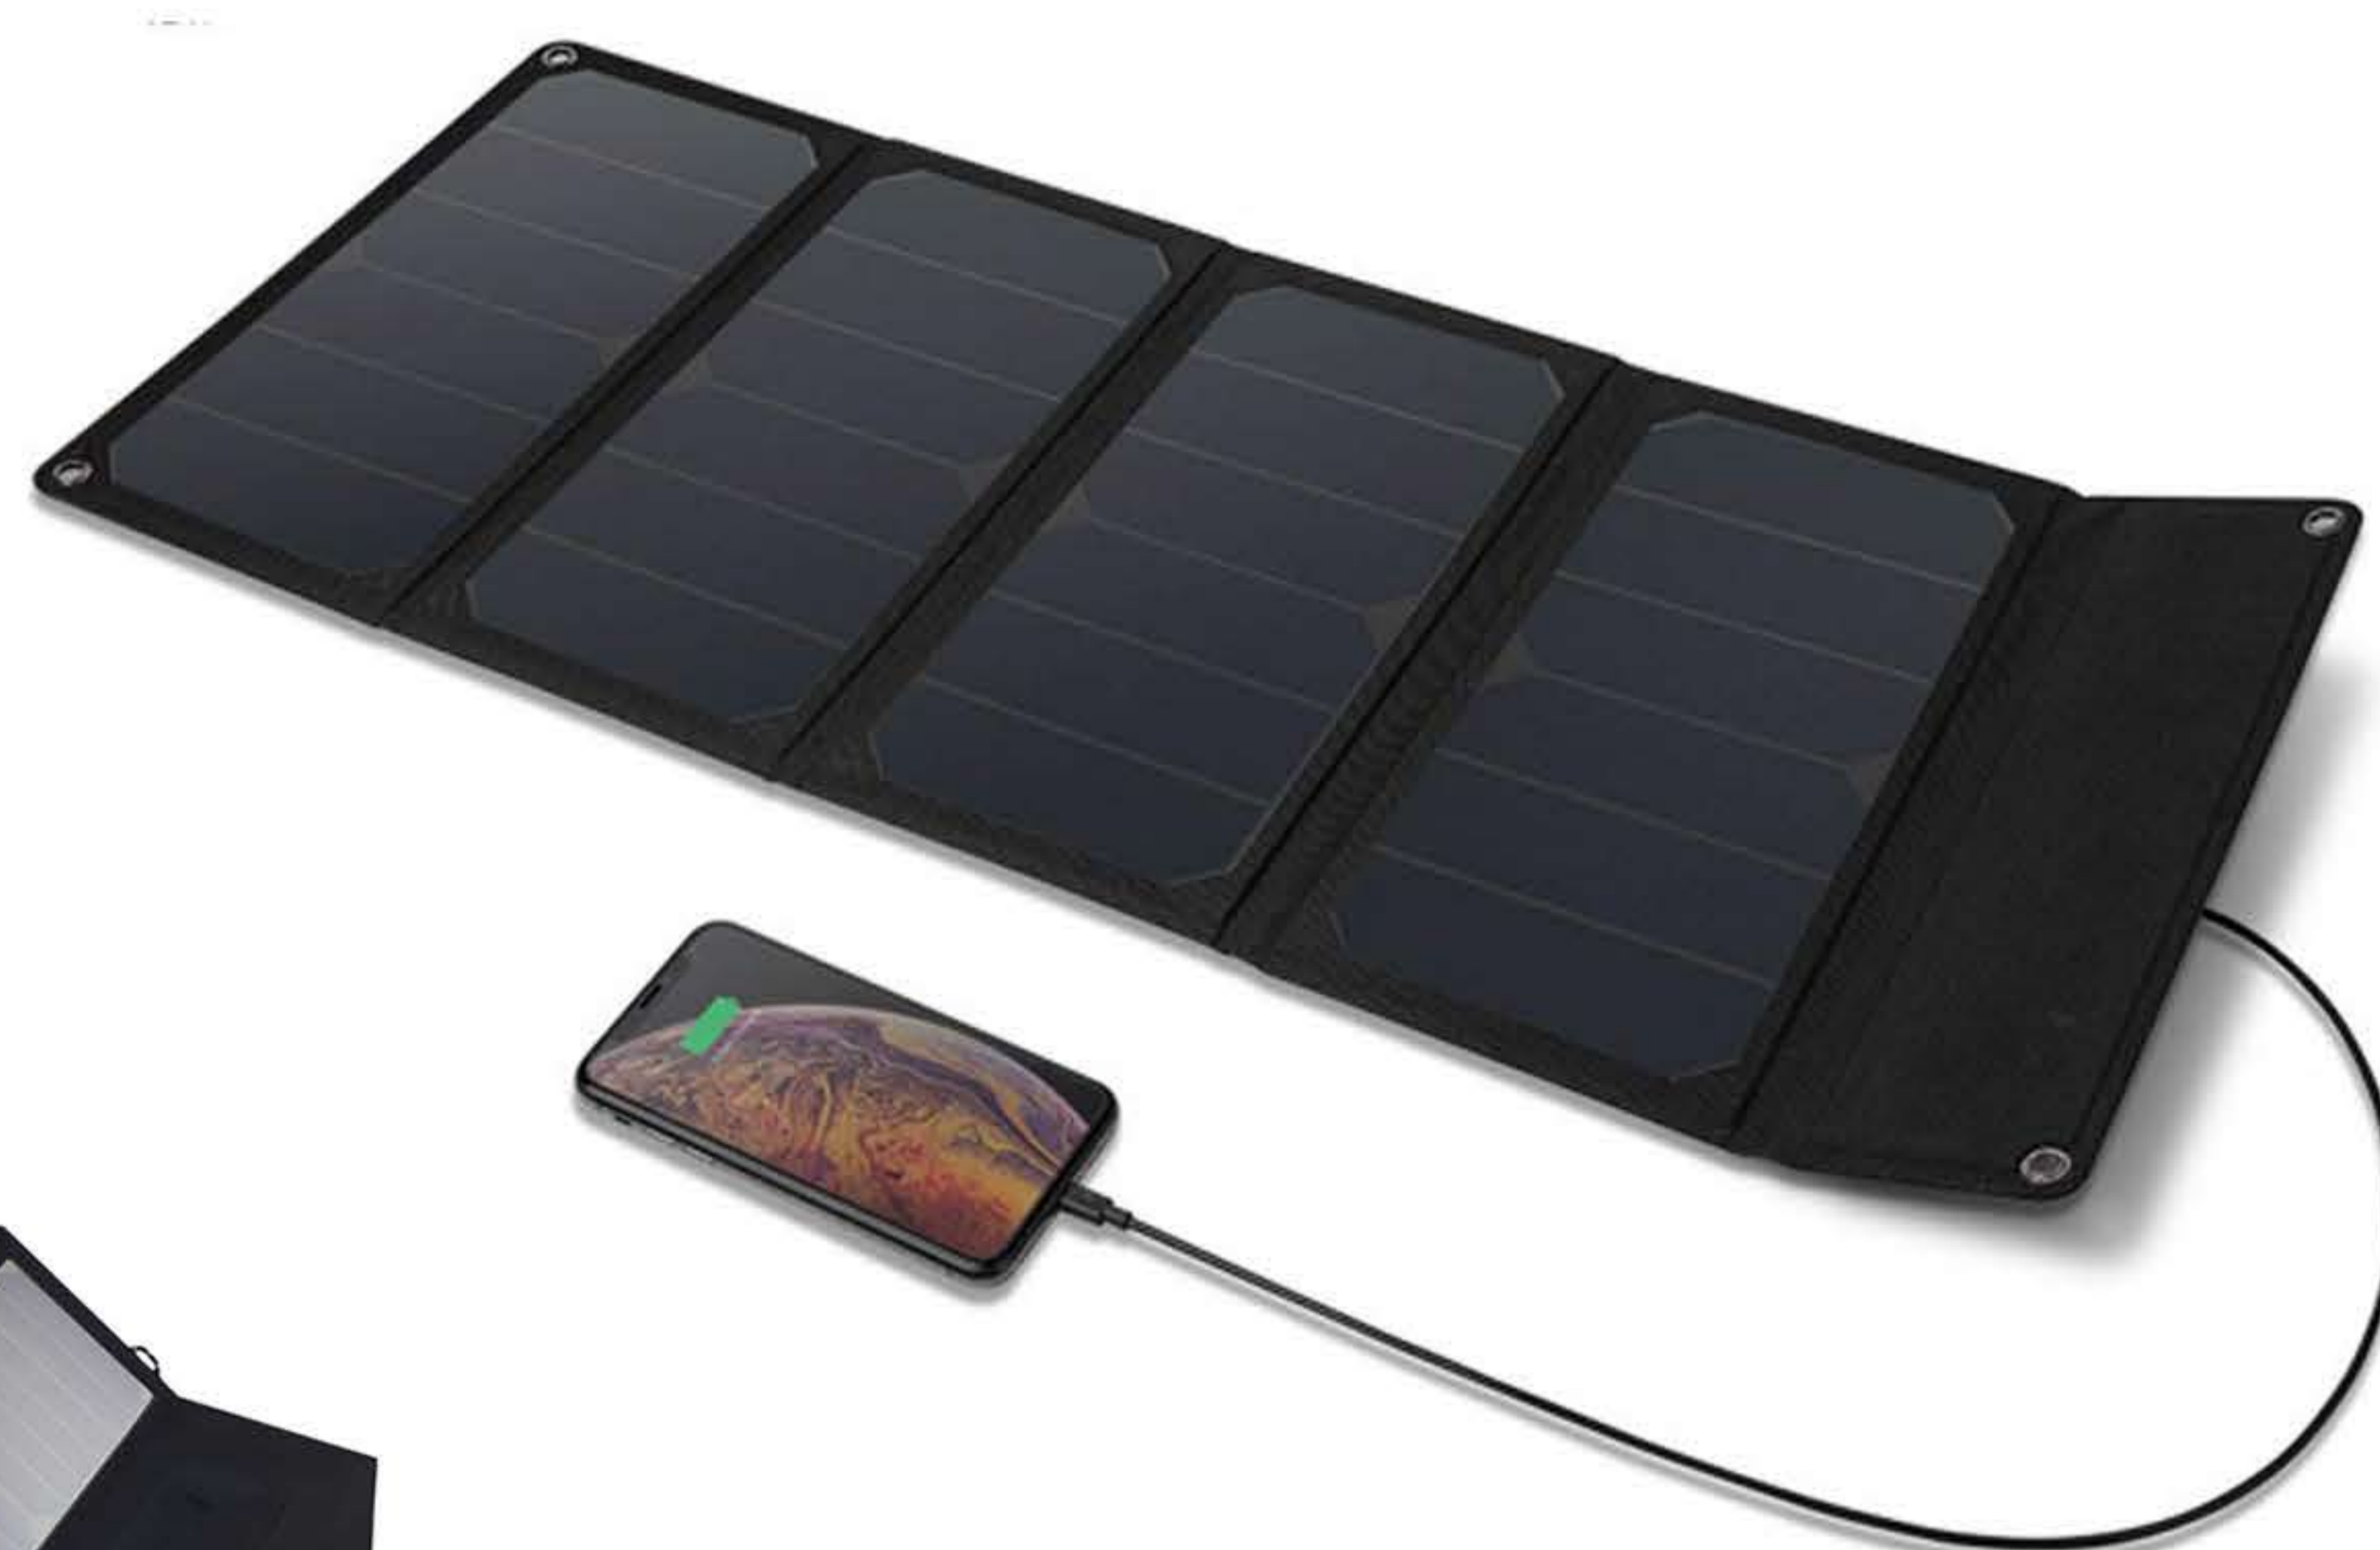

Model	BS7-FSC	BS12-FSC	BS14-FSC	BS15-FSC	BS18-FSC	BS21-FSC	BS25-FSC	BS28-FSC
Cell	Mono		Sunpower	Mono		Sunpower	Mono	Sunpower
Accessories (option)	2USB interface							
Folded Size[mm]	230*163*20	190*275*22	290*160*18	250*190*18	275*190*28	290*160*26	290*200*30	290*190*40
Unfolded Size[mm]	320*230*14	376*275*16	320*290*15	580*250*15	585*275*16	490*290*15	799*290*15	660*290*15
Tolerance[%]	0~+3%							
Nominal peak power[W]	7W	12W	14W	15W	18W	21W	25W	28W
Vmp[V]	5V							
Ipm[A]	1.40	2.40	2.80	3.00	3.60	4.20	5.00	5.60
Voc[V]	6V							
Isc[A]	4.80	6.00	7.20	11.00	12.00	14.40	18.00	
Efficiency[%]	21%		23%	21%		23%	21%	23%
Construction	Surface PET or ETFE							
	2 EVA+solar cell+EVA							
	Backboard Fiber Glass PCB							
Power temperature coefficient	-0.24%/°C							
Voltage temperature coefficient	-0.25%/°C							
Current temperature coefficient	-0.06%/°C							
NOCT	45±2°C							
Max system voltage:	100V DC							